


# CLASSIC COLLECTION

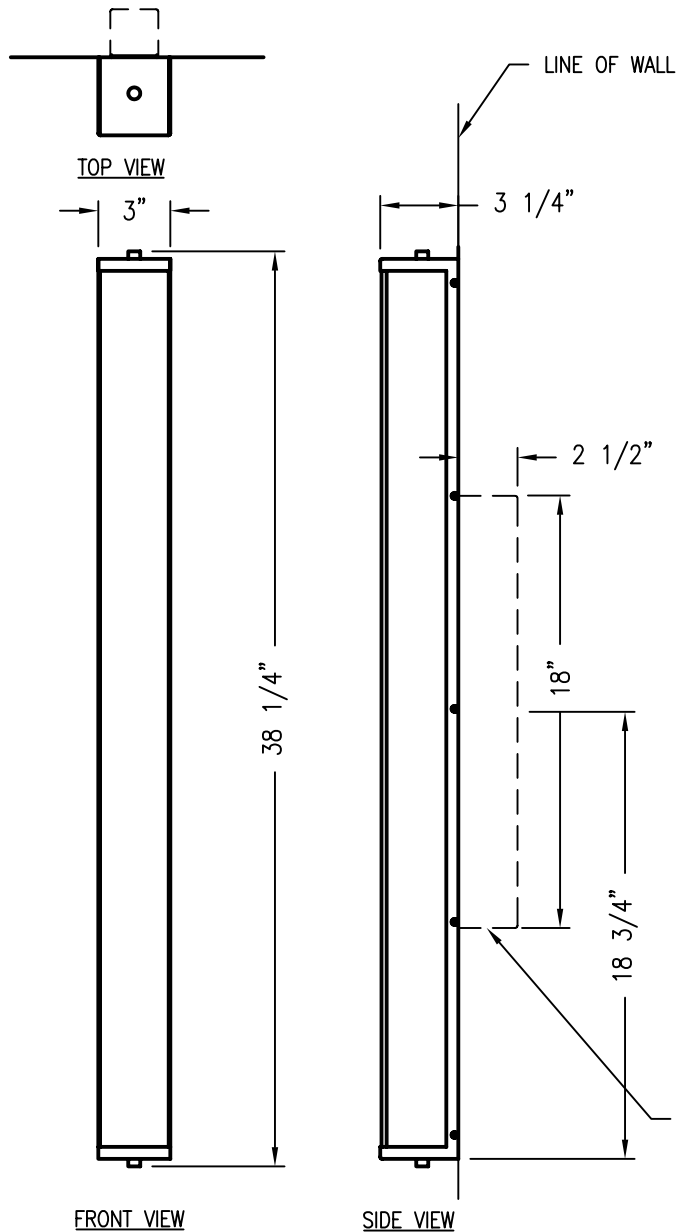

**BALLAST TYPE AND LOCATION OPTIONS:**

ELECTRONIC INSTANT START

- a- RECESSED BALLAST BOX BY BALDINGER (AS SHOWN)
- b- REMOTE MOUNTED (20 FT. MAX LEAD LENGTH) BALLAST BOX BY OTHERS.

DIMMING

- a- RECESSED BALLAST BOX BY BALDINGER (AS SHOWN) REMOTE MOUNTING NOT RECOMMENDED\*
- b- REMOTE MOUNTED BALLAST (7 FT. MAX. LEAD LENGTH)\*\*

\*ANALOG DIMMING ELECTRONIC BALLAST 0 TO 10 vDC CONTROL

\*\*LUTRON HI-LUME ® UNLESS OTHERWISE SPECIFIED



© BALDINGER ARCHITECTURAL LIGHTING, INC.

FIXTURE WEIGHT: 12 LBS.

PURCHASER: \_\_\_\_\_ DATE: \_\_\_\_\_

JOB NAME: \_\_\_\_\_ TYPE: \_\_\_\_\_ QUANTITY: \_\_\_\_\_

METAL FINISHES

- POLISHED STAINLESS STEEL
- SATIN STAINLESS STEEL
- OTHER \_\_\_\_\_

DIFFUSERS

- FLASHED OPAL GLASS
- WHITE ACRYLIC
- OTHER \_\_\_\_\_

LAMPING

- (1) F25W- T8 (see below)
  - OTHER \_\_\_\_\_
- MED BI-PIN BASE.

VOLTAGE

- 120V  277V  OTHER \_\_\_\_\_
- H.P.F.

# BALDINGER

BALDINGER ARCHITECTURAL LIGHTING INC  
 19-02 STEINWAY STREET, ASTORIA, NEW YORK 11105  
 TEL. (718)204-5700 FAX. (718)721-4986

**LE BATON**  
**CC3I4I2**

Drawn by

Rev.

Revised by

Rev.date: